
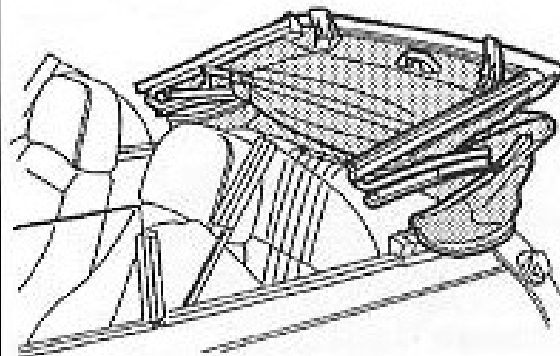
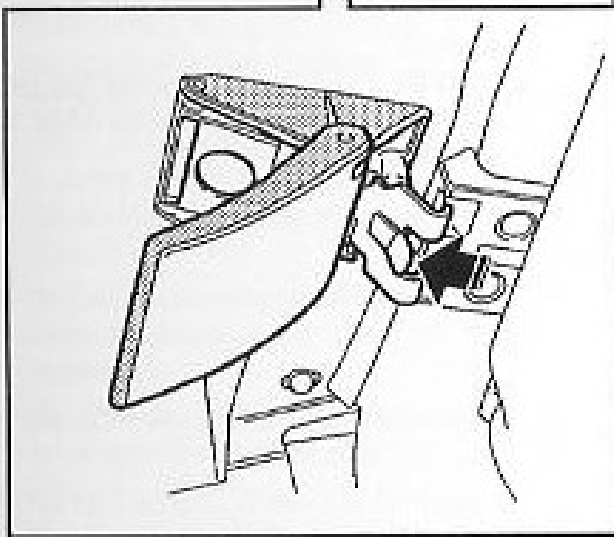
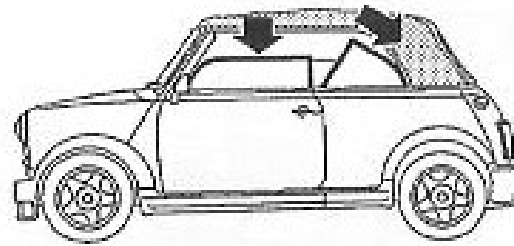


Hood

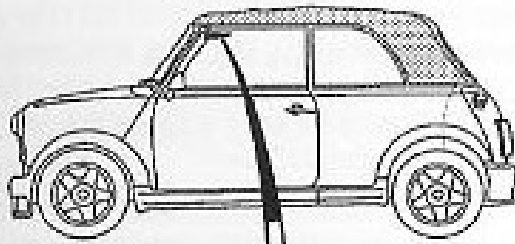

H2055A

HOOD *

Opening the hood

Two catches secure the front edge of the hood to the top rail of the windscreen surround.

Before releasing the catches, partially open ALL THE SIDE WINDOWS (unwind the window handles at least two full turns).

From inside the car, pull both catches down to release the locking hooks from their locations at the top of the windscreen surround.

Pull back catches using the finger tabs and raise the hood to rest lightly on the top of the windscreen surround.

From outside the car and with the catches released, lift the front edge and steadily push the hood towards the rear of the car until it lays flat behind the rear seats.

The hood will automatically fold into the correct position, but you should check to ensure the rear window has folded without creasing (creases could cause permanent marking of the window).

CAUTION: To prevent damage to the hood material, ensure the catches are in their open position when the hood is lowered.