


# Hood

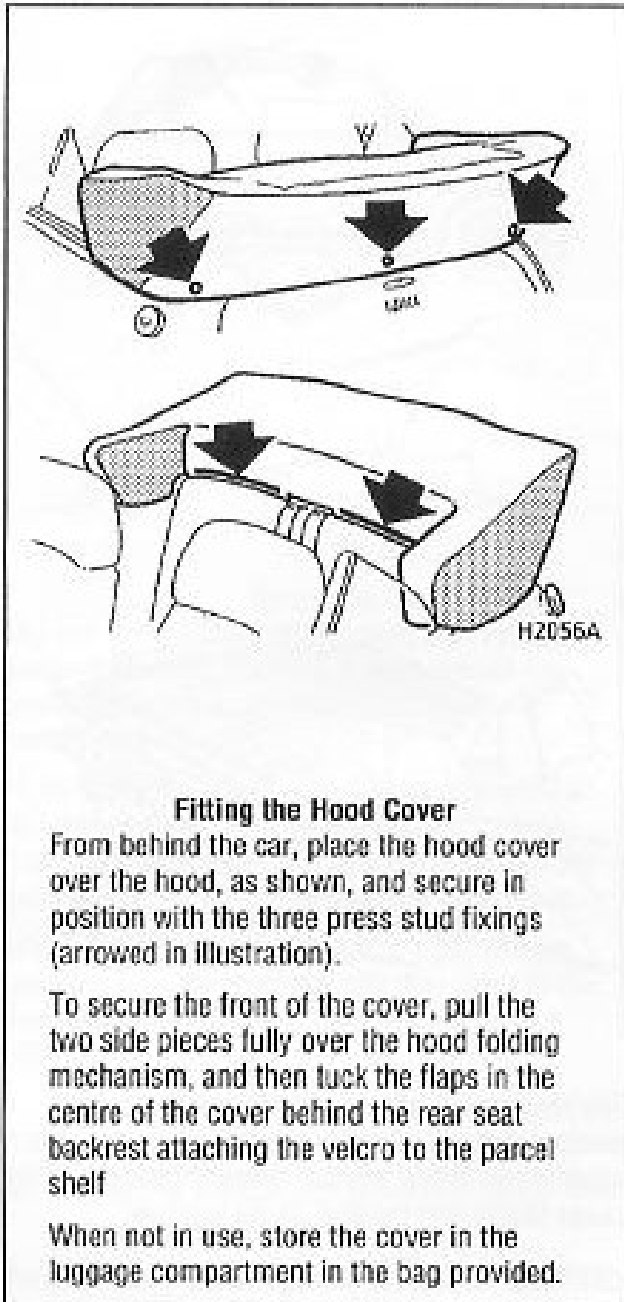

## Fitting the Hood Cover

From behind the car, place the hood cover over the hood, as shown, and secure in position with the three press stud fixings (arrowed in illustration).

To secure the front of the cover, pull the two side pieces fully over the hood folding mechanism, and then tuck the flaps in the centre of the cover behind the rear seat backrest attaching the velcro to the parcel shelf

When not in use, store the cover in the luggage compartment in the bag provided.

## Closing the Hood

Before closing the hood, remove the hood cover and partly **OPEN ALL THE SIDE WINDOWS** (unwind the window handles at least two full turns). Closing the hood is now a reversal of the opening procedure.

Once the hood is closed, it must be securely locked to the top rail of the windscreen surround as follows:

1. Using the handle mounted in the centre of the roof, pull the hood down firmly, and locate the catch hooks in the slots on either side at the top of the windscreen.
2. Push the catch handles up to lock the hood in position.
3. Close the side windows, ensuring that the window glass fits snugly into the rubber seals on each side of the hood.